


## Variable Gain 100 MHz Wideband Voltage Amplifier

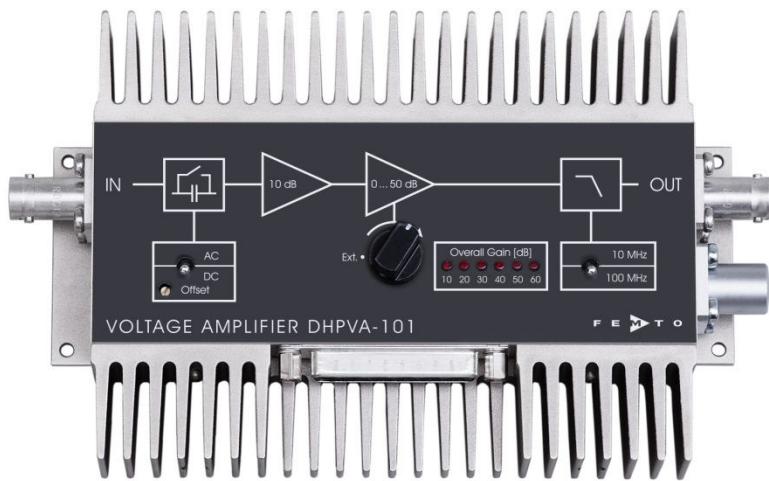


Features	<ul style="list-style-type: none"> <li>• Variable gain 10 to 60 dB (x3 to x1,000), switchable in 10 dB steps</li> <li>• Bandwidth DC ... 100 MHz, switchable to 10 MHz</li> <li>• Built-in temperature compensation for low offset drift of 0.3 <math>\mu</math>V/<math>^{\circ}</math>C</li> <li>• 2.3 nV/<math>\sqrt</math>Hz input noise</li> <li>• Switchable AC/DC-coupling</li> <li>• Bandwidth, frequency- and pulse response independent of gain setting</li> <li>• Local and remote control</li> <li>• DC monitor output</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• Oscilloscope and transient-recorder preamplifier</li> <li>• Photomultiplier and microchannel-plate amplifier</li> <li>• Signal-booster for optical receivers and current amplifiers</li> <li>• Time-resolved pulse and transient measurements</li> <li>• Automated measurement systems</li> <li>• Integration in compact systems</li> </ul>
Block Diagram	

## Variable Gain 100 MHz Wideband Voltage Amplifier

Specifications	Test conditions	$V_s = \pm 15$ V, $T_A = 25$ °C, system impedance = 50 Ω
Gain	Gain values Gain accuracy	10, 20, 30, 40, 50, 60 dB, switchable ±0.15 dB
Frequency Response	Lower cut-off frequency Upper cut-off frequency Upper cut-off frequency roll-off	DC / 10 Hz, switchable 100 MHz, switchable to 10 MHz (approx. Bessel filter characteristic for clean pulse response) see frequency response diagram (page 4)
Time Response	Rise/fall time (10 % - 90 %)	3.5 ns (@ 100 MHz) 35 ns (@ 10 MHz)
Input	Input impedance Input return loss S11  Input voltage drift Equivalent input voltage noise Equivalent input current noise 1/f-noise corner Input bias current Input offset voltage	50 Ω –37 dB @ 50 MHz –31 dB @ 100 MHz –21 dB @ 200 MHz 0.3 μV/°C 2.3 nV/√Hz (@ 30 - 60 dB gain) 3.0 pA/√Hz 20 kHz <200 nA –10 mV ... +10 mV, adjustable by offset-potentiometer and external control voltage
Output	Output impedance Output return loss S22  Output voltage range Output power (max.) Output current (max.) THD	50 Ω (terminate with 50 Ω load for best performance) –40 dB @ 50 MHz –35 dB @ 100 MHz –31 dB @ 200 MHz 2 V <sub>pp</sub> (for linear amplification) +10 dBm 70 mA <0.5 % (@ 10 MHz, 1 V <sub>pp</sub> )
Monitor Output	Monitor output gain Monitor output voltage range Monitor output current Monitor output bandwidth Monitor output impedance	x1 (@ ≥ 1 MΩ load) ±5 V ±10 mA DC ... 100 kHz 50 Ω (designed for ≥ 1 MΩ load)
Indicator LED	Function	gain setting
Digital Control	Control input voltage range Control input current Gain control switching time	Low: –0.8 ... +0.8 V High: +1.8 ... +12 V, TTL / CMOS compatible 0 mA @ 0 V, 1.5 mA @ +5 V, 4.5 mA @ +12 V 5 ms
Ext. Offset Control	Control voltage range Offset control input impedance	±10 V, corresponds to ±10 mV input offset 20 kΩ
Power Supply	Supply voltage Supply current  Stabilized power supply output	±15 V ±120 mA typ. (depends on operating conditions) ±400 mA max.  ±12 V / max. 50 mA, +5V / max. 50 mA

## Variable Gain 100 MHz Wideband Voltage Amplifier

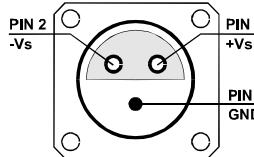
Specifications (continued)		
Case	Weight Material	560 g (1.24 lb) AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature Operating temperature	-40 °C ... +85 °C 0 °C ... +50 °C
Absolute Maximum Ratings	Power supply voltage Signal input voltage Digital control input voltage	±16.5 V ±5 V +16 V / -5 V
Connectors	Input Output Power supply	BNC jack (female) BNC jack (female) Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) Pin 1: +15 V Pin 2: -15 V Pin 3: GND
		
	Control port	Sub-D 25-pin, female, qual. class 2 Pin 1: +12 V (stabilized power supply output) Pin 2: -12 V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: +5 V (stabilized power supply output) Pin 5: monitor output Pin 6, 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control pin 10 - 25) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 MHz/10 MHz Pin 15 - 25: NC

## Variable Gain 100 MHz Wideband Voltage Amplifier

Remote Control Operation	General	<p>Remote control input bits are opto-isolated and connected by logical OR to local switch setting. For remote control a switch setting, set the corresponding local switch to "Ext.", "AC" or "10 MHz" and select the wanted setting via a bit-code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled bandwidth setting is also possible.</p>						
	Gain setting	Gain	Pin 10	Pin 11	Pin 12			
		10 dB	low	low	low			
		20 dB	high	low	low			
Typical Performance Characteristics	AC/DC setting	Coupling	Pin 13					
		AC	low					
		DC	high					
	Bandwidth setting	Bandwidth	Pin 14					
		10 MHz	low					
		100 MHz	high					
	<b>Frequency response (logarithmic)</b>							

## Variable Gain 100 MHz Wideband Voltage Amplifier

Dimensions

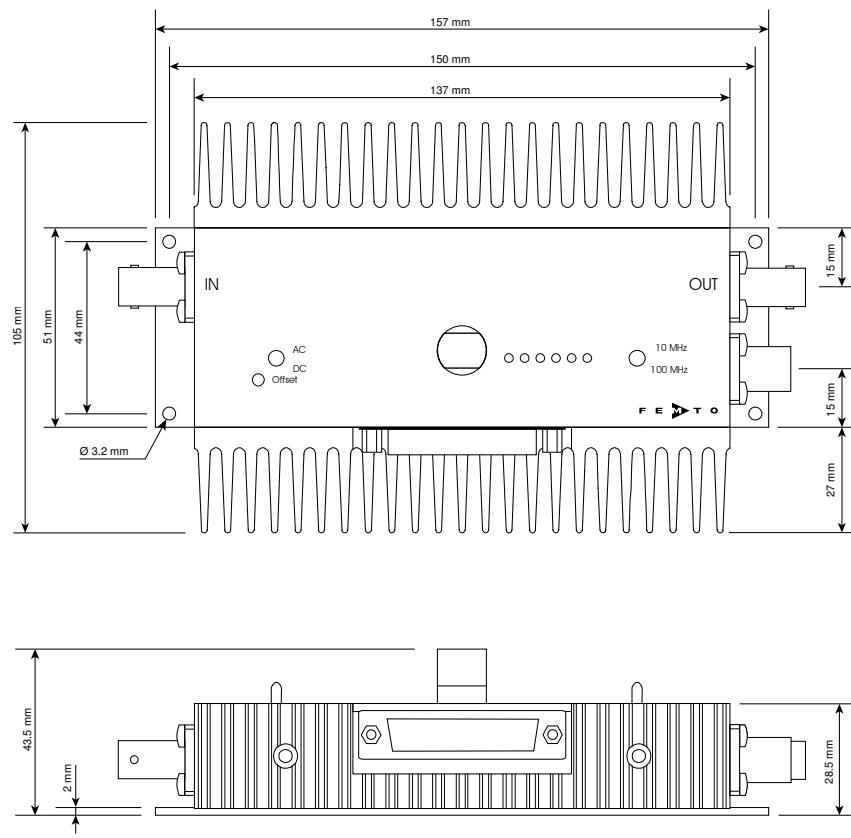

One or both heat sinks may be removed (two recessed head screws) if sufficient cooling of the case is provided otherwise (< 2 K/W), for example by mounting the amplifier with good thermal contact on a sufficiently large solid metal case/rack system.

ZYKANG

联系人：曾祥满 手机：13632925349 QQ：812401203 电话：0755- 28896837

深圳众裕康科技有限公司

Shenzhen Zhong Yu Kang Technology Co., Ltd

地址：深圳市龙岗区沙平北路111号6008 网址：[www.zykang.cn](http://www.zykang.cn) 邮箱：[zykang2021@163.com](mailto:zykang2021@163.com)