

**Specifications:****Physical**

Standard steel instrument box with cast aluminum base

- W-6.5" D-7.5" H-1.3" (32.2 x 18.1 x 3.1 cm)
- Weight - 2.8 lbs. (1.3 kg)

**Power**

- 115-120 VAC at 60 Hz
- 230-240 VAC at 50/60 Hz

**Input Voltages**

Input protection: 50 volts peak-to-peak

Maximum input signal recognized by the adaptor: 5 volts peak-to-peak

Maximum noise amplitude for complete cancellation: 1 volt peak-to-peak

**Frequency Response**

Input to output: DC to greater than 500 kHz

Hz and harmonics cancellation: 50/60 Hz to 4 kHz

# Eliminate 50/60 Hz noise and harmonics without filtering.

**Hum Bug Noise Eliminator**

- **Eliminates electrical interference**  
Simple 50/60 Hz sine waves  
Mixtures of 50/60 Hz harmonics  
Noise spikes from dimmers  
Complex noise from fluorescent lamps
- **No waveform distortion**  
No frequency loss or DC voltage shift  
No signal attenuation or phase error

The Hum Bug is a powerful device for canceling electrical interference in real-time, avoiding all of the traditional problems associated with notch filters. The Hum Bug constructs a replica of noise present on the input signal and continuously subtracts this replica from the signal as it passes through the instrument. It performs this function in the presence of biological activity even when noise characteristics evolve over time.

深圳众裕康科技有限公司  
Shenzhen Zhong Yu Kang Technology Co., Ltd

联系人：曾祥满 手机：13632925349 QQ：812401203 电话：0755-28896837

地址：深圳市龙岗区沙平北路111号6008 网址：www.zykang.cn 邮箱：zykang2021@163.com

The Hum Bug is not a filter. It does not create phase delays, amplitude errors, DC shifts or waveform distortion. Simply connect it between your preamplifier and any analysis equipment and it will automatically eliminate 50/60 Hz noise and harmonics with frequencies up to several kHz. Noise is eliminated without altering the signal of interest even when frequencies within the signal overlap with noise components. No settings or adjustments are required.

The Hum Bug can eliminate 50/60 Hz noise from virtually any analog signal. It is equally effective at removing noise associated with inadequate grounding, ground loops, and electrical pickup. Common applications include noise elimination from signals recorded using microelectrodes, skin electrodes (EKG, EMG, EEG), high gain amplifiers, magnetic sensors, and audio equipment.

### Controls

**Bypass:** halts noise cancellation by routing input directly to output


**Hold:** suspends adaptation to evolving noise characteristics

**Clear:** clears the noise replica

### Display


LED indicates changing noise levels

- Green: decreasing amplitude of the noise replica
- Red: increasing amplitude of the noise replica

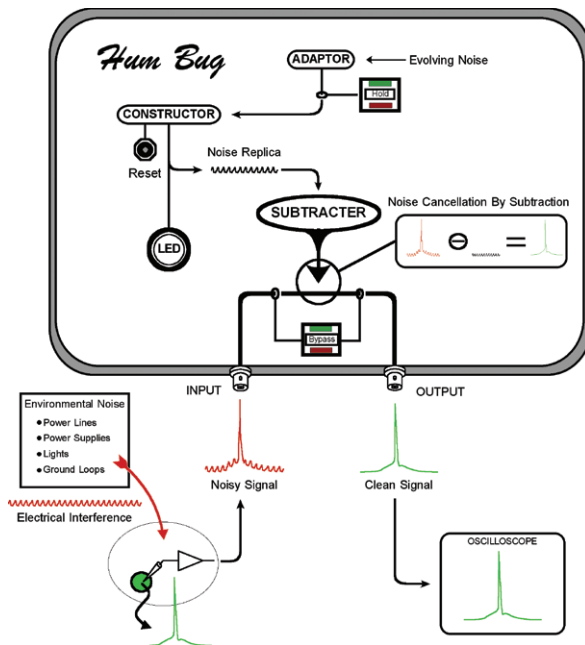

### Ordering Information

Part No.	Hum Bug Noise Eliminator
Q-HUMBUG	Hum Bug - 50/60Hz active noise eliminator



联系人：曾祥满 手机：13632925349 QQ：812401203 电话：0755-28896837

深圳众裕康科技有限公司 地址：深圳市龙岗区沙平北路111号6008 网址：www.zykang.cn 邮箱：zykang2021@163.com  
 Shenzhen Zhong Yu Kang Technology Co., Ltd